

MB30

Mult-Biometric

T&A and Access Control Terminal




Features

- Fingerprint, face, RFID and password 4 type verification mode
- High-speed identification less than 1 second
- TCP/IP Port for Internet connection
- Access Port available to control one lock and exit button
- Optional 5V 1900mAH UPS, standby up to 3 hours


Specification

Product		MB30
Main	Biometric Access Card	Fingerprint and Face 125kHz EM / RFID S50/S70 IC Card (13.56 MHz)
Capacity	Max User(1:N) Max Fingerprint (1:N) Max Face (1:N) Max Record	1000 500 500 50,000
Interface	TCP/IP USB Relay	10/100 Mbps USB 2.0 (Host) 1 Relay
Hardware	LCD Sound Operating Temp. Operating Humidity Power Dimensions(W x H x D)	2.8" Color LCD Stereo speaker 0 °C to 45 °C 20% to 80% DC 12V 1.5A 161.93mm x 152.82mm x 30.59mm
Function	Standard	Automatic Status Switch, Self-Service Query, DST, T9 Input 9 Digit User ID, Scheduled Bell, Photo ID Lock, sensor, Exit button
	Optional	ID and RFID S50/S70 IC Card (13.56 MHz)
Compatibility		ZKTime.net 3.0 ZKAccess 3.5

Configuration

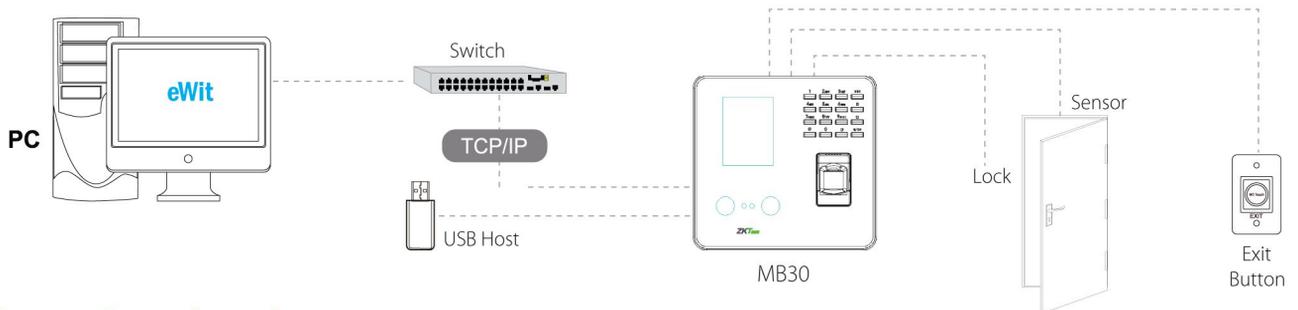

Dimensions (mm)

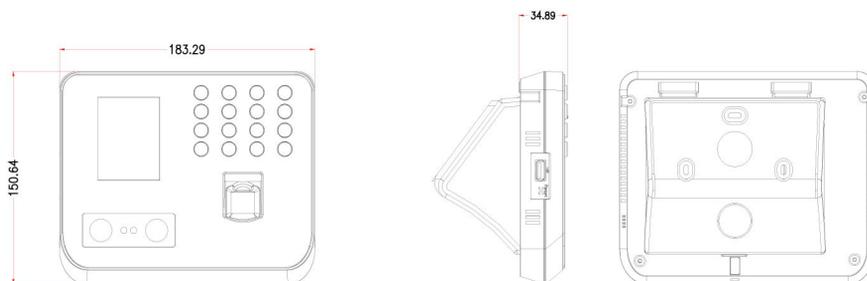

eWit infotech

www.ewit.in

[email- support@ewit.in](mailto:support@ewit.in)